


**■Features**

- High Luminous PLCC6 Top SMD LEDs
- 5.0x5.0x1.5mm Standard Directivity
- Long lifetime Operation
- Superior Weather-resistance
- Yellow Diffused Type

**■Applications**

- Backlighting (switches, keys, displays, illuminated advertising etc.)
- Substitution of Micro Incandescent Lamps
- Reading Lamps / Emergency Lighting
- Marker lights (e.g. steps, exit ways, etc.)
- Other Lighting

**■Outline Dimension**

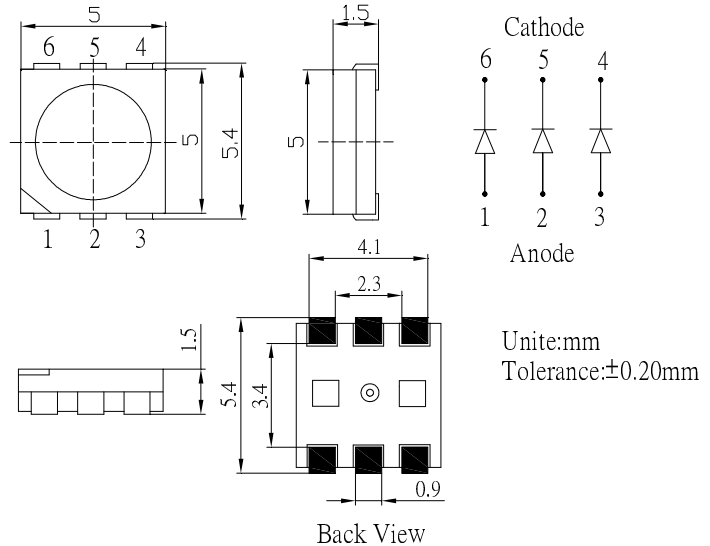


**■Absolute Maximum Rating**

(Ta=25°C)

| Item                       | Symbol           | Value      | Unit |
|----------------------------|------------------|------------|------|
| DC Forward Current         | I <sub>F</sub>   | 80         | mA   |
| Pulse Forward Current*     | I <sub>FP</sub>  | 120        | mA   |
| Reverse Voltage            | V <sub>R</sub>   | 5          | V    |
| Power Dissipation          | P <sub>D</sub>   | 288        | mW   |
| Operating Temperature      | T <sub>opr</sub> | -30 ~ +85  | °C   |
| Storage Temperature        | T <sub>stg</sub> | -40~ +100  | °C   |
| Lead Soldering Temperature | T <sub>sol</sub> | 260°C/5sec | -    |

\*Pulse width Max.10ms Duty ratio max 1/10

**■Directivity**

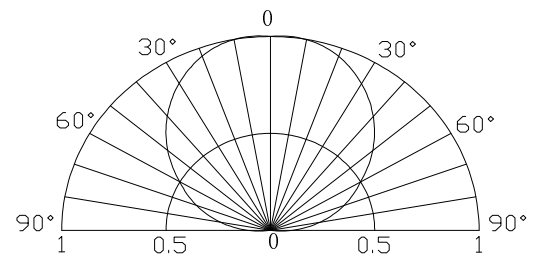

**■Electrical -Optical Characteristics**

(Ta=25°C)

| Item                     | Symbol            | Condition            | Min. | Typ.  | Max. | Unit |
|--------------------------|-------------------|----------------------|------|-------|------|------|
| DC Forward Voltage       | V <sub>F</sub>    | I <sub>F</sub> =60mA | 2.8  | 3.2   | 3.6  | V    |
| DC Reverse Current       | I <sub>R</sub>    | V <sub>R</sub> =5V   | -    | -     | 30   | μA   |
| Luminous Flux            | Φ <sub>v</sub>    | I <sub>F</sub> =60mA | 23   | 25.5  | -    | lm   |
| Chromaticity Coordinate* | x                 | I <sub>F</sub> =60mA | -    | 0.395 | -    |      |
|                          | y                 | I <sub>F</sub> =60mA | -    | 0.455 | -    |      |
| 50% Power Angle          | 2θ <sub>1/2</sub> | I <sub>F</sub> =60mA | -    | 120   | -    | deg  |

\*1 Tolerance of measurements of chromaticity coordinate is ±10%

\*2 Tolerance of measurements of luminous flux is ±15%

\*3 Tolerance of measurements of forward voltage is ±0.1V